


SPECIFICATION FOR APPROVAL

1.Material

Production:	Sendust Cores
KDM.P/N:	KS290-040A
AL:	137(nH/N ²) ± 8%
Material:	40 μ
Coating Color:	Black
Coating material:	epoxy
Coating Breakdown Voltage:	1000V, 0.5mA, 2Sec

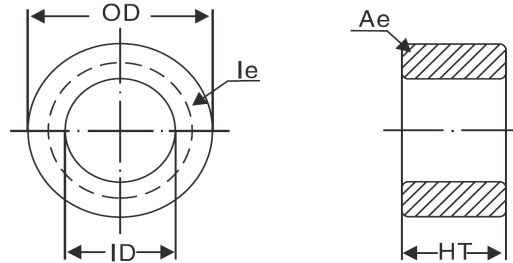


2.Physical Characteristics

Before Coating			After Coating			Le(cm)	Ae(cm ²)	V(cm ³)	W(cm ²)	Weight (g) (ref.)	Box Quantity (Pieces)
OD(Max.) in/mm	ID(Min.) in/mm	Ht(Max.) in/mm	OD(Max.) mm	ID(Min.) mm	Ht(Max.) mm						
2.945 74.80	1.783 45.30	1.378 35.00	75.20	44.07	36.27	18.380	5.040	92.640	15.246	539.5	27


3.Electrical Parameters(Typical) Temperature(25°C ± 2°C)

Test Item	Test Condition	Value(Typical)	Test Instrument
Inductance	φ 0.8mm/98Ts, 20kHz/1V, I=0A (Evenly full windings)(均匀绕满)	1315.7 μ H ± 8%	CH3302
DC-Bias	φ 0.8mm/98Ts, 20kHz/1V, I=15A(H=1000Oe) (Evenly full windings)(均匀绕满)	786.8 μ H (Min.)	WK3255B+WK3265B
Core Loss	50kHz/1000Gs	420mW/cm ³ (Max.)	SY-8219
Remarks	Set the internal resistance of LCR meter to 100Ω.(电感测试仪内阻设置100Ω)		

Core Loss Curves(Typical)

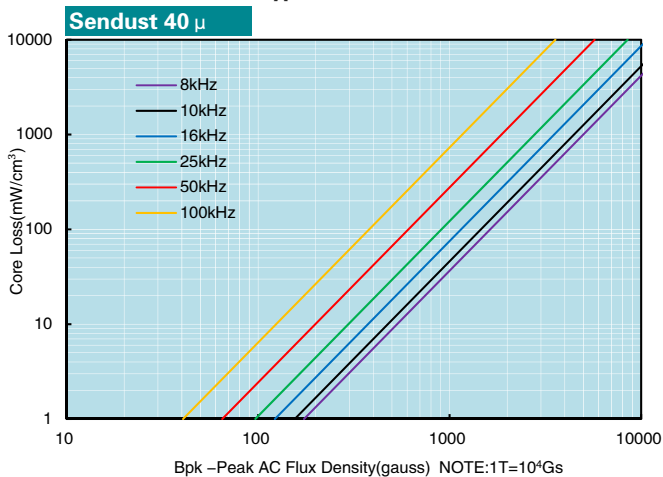

DC-Bias Curves(Typical)

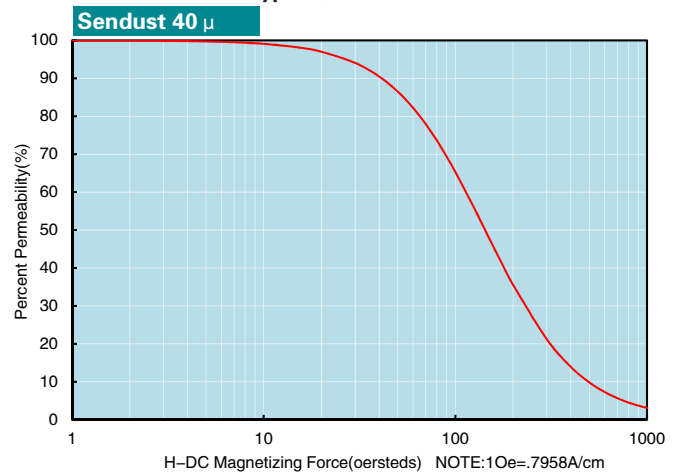

KDM确认栏
KDM
Signature

**科达磁电
技术部**

客户确认栏
Customer
Signature

请在5个工作日内回签承认书, 否则此承认书将作为后续订单的OQC标准。若有疑问, 请及时联系我司RD部门。
Please sign back after approval within 5 working days, otherwise this approval sheet would be taken as OQC standard for subsequent orders. If you have any questions, please contact RD department in time.